

DATA SHEET: Flo Easy FIBC Discharger

The Flo Easy Discharger is designed for the efficient and economic discharge of materials having free to medium flow properties with 15° or 40° hoppers to suit the material type. It handles a wide range of bag types from single trip, flat bottomed, to multi trip outlet spouted with or without liners.

FLO EASY STANDARD FEATURES

- Fork lift or hoist loaded arrangements
- Load tested FIBC rigging frame
- With or without dust control membrane and dust extraction port
- With or without vibration facility to assist material discharge
- Six bladed knife for flat bottomed bags
- Operator access door for untying the bag outlet spout
- With or without patented liner tensioning system



FLO EASY OPTIONS

- Volumetric feeders
- Batch / continuous loss in weight systems
- Low headroom arrangement – de-mountable FLT loading
- Integral 25kg sack tip hopper
- Dust Collector
- Hazardous area/ATEX models
- IBC or Octabin discharge arrangements
- Bag closure Flo Choke device




ADVANTAGES

- Easy to use, one man operation
- Discharges a wide variety of materials and bag designs
- Compact – minimum floor space
- Easy / quick installation
- Low maintenance

TECHNICAL SPECIFICATION

FIBC (Big Bag)	Lined or unlined
Seam height:	To suit application
Base:	Up to 980mm square standard
Loops:	Corner or cross corner
Capacity:	Up to 2000kg standard
Discharge rate	Typically up to 10 bags / hour

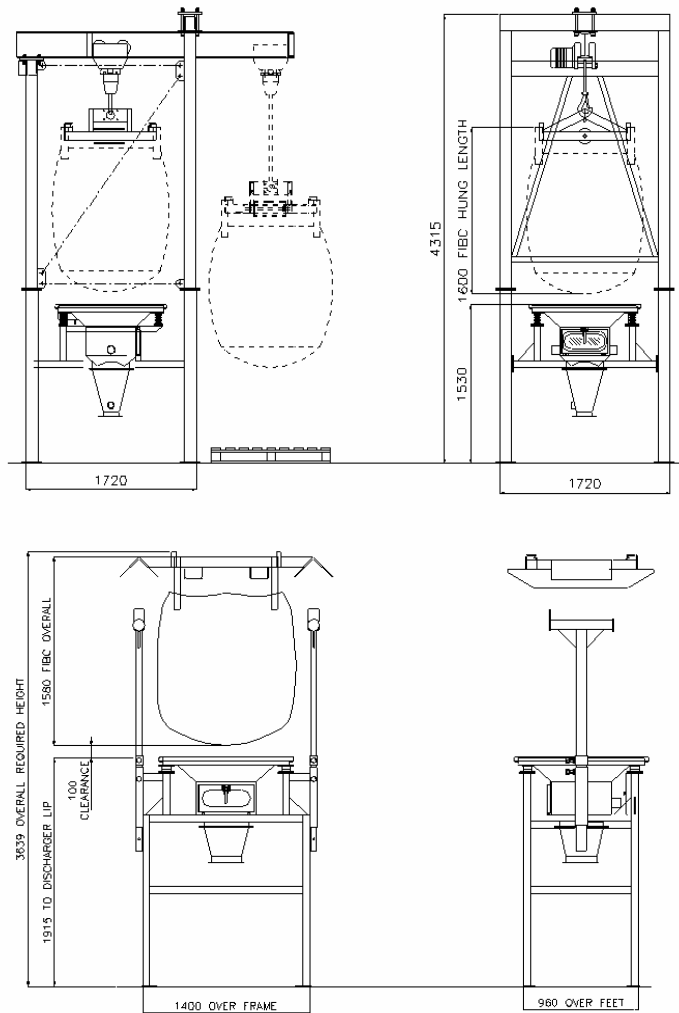

For further information contact:

Flomat Bagfilla International Ltd

28 Charles Street

Higher Hillgate

Stockport

SK1 3JR

Tel: 0161 477 4775

Fax: 0161 474 0257

Email: pmhsales@fairport.co.uk

Web: www.fairport.co.uk



fairport

PROCESS MATERIALS HANDLING DIVISION

All information contained in this data sheet remains the property of Flomat Bagfilla International. Copying or reproduction of any information is not permitted without prior consent of Flomat Bagfilla. We reserve the right to change or modify information in this document without notice.